

NTG-2

Directional Condenser Microphone

RØDE[®]
MICROPHONES




Features

- Broadcast sound quality
- Low noise circuitry
- Condenser transducer
- Rugged metal construction
- Two step High Pass Filter (Flat/80Hz)
- P48 phantom power or 1.5V AA battery option
- Low handling noise
- Low weight - 161g (5.17 oz.)
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

| | | | |
|--------------------|--|---------------------|---|
| Acoustic Principle | Line Gradient | Directional Pattern | Super-Cardioid |
| Frequency Range | 20Hz ~ 20,000Hz (selectable HPF@80Hz) | Sensitivity | -36dB \pm 2dB re 1V/Pa @ 1kHz |
| Nominal Impedence | 250 Ω - phantom power 350 Ω - battery power | Equivalent Noise | 18dBA SPL (A - weighted per IEC651) |
| Maximum Output | +6.9dBu (@ 1% THD into 1k Ω) | Dynamic Range | 113dB (per IEC651) |
| Maximum SPL | 131dB (@ 1kHz, 1% THD into 1k Ω load) | Signal/Noise | 76dB SPL (A - weighted per IEC651) |
| Power Req. | 48V Phantom Power or 1.5 AA battery | Dimensions | Length - 278mm Diameter - \varnothing 22mm |
| Output Connection | 3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground) | Net Weight | 161g |

Frequency Response

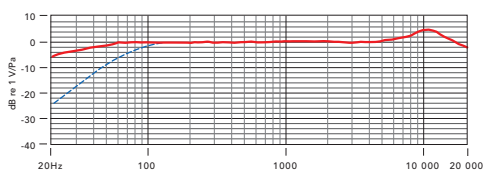

Frequency Response



Included Accessories

- WSVM Wind shield
- ZP2 Zip pouch
- RM5 Mic clip



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
6385 Rose Lane, Carpinteria CA 93013 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071